



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>A61F 2/44</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/74607</b> (43) International Publication Date: 14 December 2000 (14.12.2000)
(21) International Application Number: PCT/US00/15654  (22) International Filing Date: 08 June 2000 (08.06.2000)  (30) Priority Data: 09/327,982 08 June 1999 (08.06.1999) US  (60) Parent Application or Grant OSTEOTECH, INC. [/]; (). BOYCE, Tood, M. [/]; (). MARTZ, Erik, O. [/]; (). SCARBOROUGH, Nelson, L. [/]; (). DILWORTH, Peter, G.; ().		Published
(54) Title: KEYED INTERVERTEBRAL DOWEL (54) Titre: ENTRETOISE INTERVERTEBRALE CLAVETE		
(57) Abstract  <p>An intervertebral implant (50) having a tabbed configuration is provided. The intervertebral implant includes a substantially cylindrical body portion (52), and a pair of radially extending tabs (62, 64). The radially extending tabs may be provided as a single or double pair (66, 68), may assume various shapes, and configurations for engaging the interior of a bore (E) formed between adjacent vertebrae (X, Y). A through bore (60) or plurality of through bores extend from the top surface (58) of the implant to the bottom surface (70) of the implant. The implant may be formed from a cortical ring (C) cut from the diaphysis of a long bone (D) by milling. Alternatively, the implant may be formed of any biocompatible material having the requisite strength requirements via any known process, i.e., molding. There is also disclosed a method of insertion of the implant including forming a stepped bore between adjacent vertebrae, inserting the implant between adjacent vertebrae with tabs in alignment with the spaced defined by the adjacent vertebrae, and rotating the implant such that the tabs are rotated within an enlarged or stepped portion of the bore to secure it therein.</p> (57) Abrégé  <p>L'invention concerne un implant intervertébral (50) pourvu de tenons. Cet implant intervertébral comporte un corps sensiblement cylindrique (52) ainsi qu'une paire de tenons orientés dans le sens radial (62, 64). Cet implant peut également comporter une double paire (66, 68) de tenons qui peuvent présenter diverses formes et configurations de manière à s'engager dans un trou (E) formé entre des vertèbres adjacentes (X, Y). Un ou plusieurs trous traversants (60) traversent l'implant de la surface supérieure (58) à la surface inférieure (70). L'implant peut être constitué par fraisage à partir de l'entaille de l'anneau cortical (C) de la diaphyse d'un os long (D). Dans un variante, l'implant peut être constitué de n'importe quelle matière biocompatible présentant la résistance requise, au moyen de n'importe quel procédé connu, par exemple par moulage. L'invention concerne également un procédé d'insertion de l'implant consistant à former un trou étagé entre des vertèbres adjacentes, à insérer l'implant entre ces vertèbres adjacentes à l'aide de tenons alignés sur l'espace défini par ces vertèbres adjacentes et à faire tourner l'implant de sorte que les tenons tournent dans une partie élargie ou étagée du trou, ce qui permet de fixer l'implant dans le trou.</p>		

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 December 2000 (14.12.2000)


PCT

(10) International Publication Number  
**WO 00/74607 A1**

- (51) International Patent Classification<sup>7</sup>: A61F 2/44  
Road, Jackson, NJ 08527 (US). SCARBOROUGH, Nelson, L.; 47 Lambert Johnson Drive, Ocean, NJ 07712 (US).
- (21) International Application Number: PCT/US00/15654
- (22) International Filing Date: 8 June 2000 (08.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/327,982 8 June 1999 (08.06.1999) US
- (71) Applicant: OSTEOTECH, INC. [US/US]; 51 James Way, Eatontown, NJ 07724 (US).
- (72) Inventors: BOYCE, Tood, M.; 515 Wellington Place, Aberdeen, NJ 07747 (US). MARTZ, Erik, O.; 775 Brewers
- (74) Agents: DILWORTH, Peter, G. et al.; Dilworth & Barrese, LLP, 333 Earle Ovington Boulevard, Uniondale, NY 11553 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: KEYED INTERVERTEBRAL DOWEL

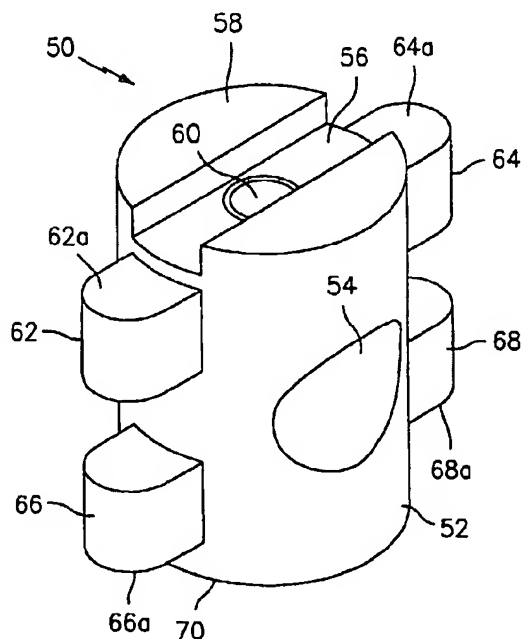

(57) Abstract: An intervertebral implant (50) having a tabbed configuration is provided. The intervertebral implant includes a substantially cylindrical body portion (52), and a pair of radially extending tabs (62, 64). The radially extending tabs may be provided as a single or double pair (66, 68), may assume various shapes, and configurations for engaging the interior of a bore (E) formed between adjacent vertebrae (X, Y). A through bore (60) or plurality of through bores extend from the top surface (58) of the implant to the bottom surface (70) of the implant. The implant may be formed from a cortical ring (C) cut from the diaphysis of a long bone (D) by milling. Alternatively, the implant may be formed of any biocompatible material having the requisite strength requirements via any known process, i.e., molding. There is also disclosed a method of insertion of the implant including forming a stepped bore between adjacent vertebrae, inserting the implant between adjacent vertebrae with tabs in alignment with the spaced defined by the adjacent vertebrae, and rotating the implant such that the tabs are rotated within an enlarged or stepped portion of the bore to secure it therein.

WO 00/74607 A1

**WO 00/74607 A1**



IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *With international search report.*

Description

5

10

15

20

25

30

35

40

45

50

55

5

KEYED INTERVERTEBRAL DOWEL

10

5 BACKGROUND OF THE INVENTION1. Technical Field

15

The present disclosure relates to an intervertebral implant for spinal fusion and more particularly, to an intervertebral dowel having at least two radially extending tabs for securing the dowel within a receiving bed formed in the intervertebral space.

20

10

2. Background of Related Art

25

The spine is a flexible column formed of a series of bone called vertebrae. The vertebrae are hollow and piled one upon the other, forming a strong hollow column for support of the cranium and trunk. The hollow core of the spine houses and protects the nerves of the spinal cord. The different vertebrae are connected together by means of articular processes and intervertebral, fibro-cartilages. In general, a vertebral body is made of a cortical shell enclosing a cancellous (spongy) bone core. The portion of the cortical bone shell facing the surface of the disk is the endplate.

30

15

35

40

20

The intervertebral fibro-cartilages are also known as intervertebral disks and are made of a fibrous ring filled with pulpy material. The disks function as spinal shock absorbers and also cooperate with synovial joints to facilitate movement and maintain flexibility of the spine. When one or more disks degenerate through trauma,

45

50

55

5 spondylolisthesis or other pathologies, nerves passing near the affected area may be  
compressed and are consequently irritated. The result may be chronic and/or  
10 debilitating back pain. Various methods and apparatus, both surgical and non-surgical,  
have been designed to relieve such back pain.

5 One method designed to relieve such back pain is interbody spinal  
15 fusion. Typically, interbody spinal fusion involves distracting adjoining vertebrae of  
the spine so that the nerve root canal sizes are increased and nerve irritation is  
20 eliminated or reduced. In order to maintain the adjoining vertebrae in a distracted  
state, at least one intervertebral implant is inserted into a receiving bed formed between  
10 the vertebrae. The implant is positioned to engage the adjoining vertebrae to maintain  
25 the vertebrae at a fixed degree of distraction.

Preferably, the implant should stabilize the intervertebral space and  
30 become fused to adjacent vertebrae in order to prevent the implant and adjacent  
vertebrae from moving. The implant must also provide spinal load support between the  
15 vertebrae. Further, during the time it takes for fusion, i.e. biological fixation of the  
35 vertebrae, to be completed, the implant should have enough structural integrity to  
maintain the space without substantial degradation or deformation of the implant. The  
40 implant should also have sufficient stability to remain in place prior to actual  
completion of bone ingrowth fusion. The implant should include structure which  
20 maintains the implant in position between the vertebrae while bone ingrowth is  
45 occurring. To facilitate rapid bone growth, and thus quick fusion, the implant may

5 include or be provided with a bone growth supporting material. Obviously, the  
material from which the implant is constructed should be a biocompatible material and,  
10 preferably, interact biologically with the body's own naturally occurring tissues.

A variety of different types of intervertebral implants have been  
5 developed to perform this function including spinal fusion cages, threaded bone dowels  
15 and stepped bone dowels. An exemplary implant is disclosed in U.S. Patent  
Application filed on even date herewith, under Certificate of Express Mail Label No.  
20 EL260888076US, and entitled "Ramp-Shaped Intervertebral Implant", the entire  
disclosure of which is incorporated by reference herein.

10 Common deficiencies in some of the prior art implants may include  
25 expulsion of the implant from between adjacent vertebrae, difficulty in inserting the  
implant into position, and/or lack of ability to allow incorporation of implant into the  
30 body. Also, in some prior art spinal fusion methods utilizing implants, the vertebrae  
may need to be distracted to a large extent in order to position the implant between the  
15 vertebrae.

35 Accordingly, a need exists for an improved intervertebral implant which  
is configured to prevent the likelihood of expulsion or retropulsion during normal  
40 patient activity, provide ease of insertion and include structure to facilitate  
incorporation of the implant into the body. Furthermore, need exists for an improved  
20 intervertebral implant which can be inserted between vertebrae without excessive  
45 distraction of the vertebrae and a method of installing such an implant.

## SUMMARY

In accordance with the present disclosure, an intervertebral implant having tabbed securing structure is provided. The intervertebral implant includes a substantially cylindrical body portion and at least one pair of radially extending tabs that are configured to engage vertebral bodies.

By engaging the vertebrae, the tabs reduce the likelihood that expulsion or retropulsion might occur. This is particularly significant in that where an implant is pushed out of place, damage to vital structures including neural (the spinal cord and existing nerve roots) and vascular (the aorta and inferior vena cava) can occur resulting in possible injury or death. Additionally, the tabs assist in preventing migration of the implant due to rotation of the adjacent vertebrae.

The tabs may take the form of various shape and constructions, such as, for example, smooth rounded, wedge shaped, cam shaped, toothed, or threaded, etc. In alternate embodiments, two diametrically opposed pairs of tabs are provided on the cylindrical body portion. In various embodiments, a throughbore or a plurality of throughbores extend from a top surface of the implant to the bottom surface of the implant providing a space for boney bridging to occur between the vertebrae which are intended to be fused. The throughbore(s) is dimensioned to receive growth factors or other grafting materials to stimulate bone healing. The pairs of tabs may be provided adjacent the opening of the throughbore or may be offset 90° from the openings of the throughbore. In one embodiment of an intervertebral implant, the cylindrical body portion is tapered.



5

In an alternate embodiment, the implant has an abbreviated body portion and does not include a throughbore.

10

In another embodiment, the tabs are formed by inserting a cortical plug through the throughbore. Preferably, the cylindrical body portion includes a slot formed in one end thereof for receipt of an insertion tool and a bore extending between the slot and into the throughbore for facilitating insertion and facilitating injection into the throughbore of any desirable material, such as, for example, bone growth stimulants, autograft, allograft, demineralized bone matrix, or other bone grafting materials.

15

20

25

Further, alternate embodiments may include body portions having shapes other than cylindrical, such as, those having rectangular, oval, multi-sided, etc., cross-sections.

30

In a preferred embodiment, the implant is formed from a cortical ring allograft cut from the diaphysis of a long bone. By utilizing bone or bone-derived materials as the implant material, the implant has the added advantage of facilitating incorporation of the implant into the body. The implant can be formed by milling the top and bottom surfaces of a cortical ring to form the substantially cylindrical body portion and a pair of radially extending wings. The implant is further milled such that the radially extending wings are formed into tabs each of which is spaced a predetermined distance from the end of the cylindrical body portion. Additionally, each tab may be milled so as to form the desired camming, wedge, threaded, etc.

35

40

45

50

55

5 shape. The implant is milled such that the intramedullary canal of the cortical ring defines a throughbore in the cylindrical body portion of the implant. Alternatively, the  
10 implant may be formed of any biocompatible material such as titanium and titanium alloys, stainless steel, carbon fiber, ceramics, etc. having the requisite strength requirements via any known process, i.e., molding, machining, etc. Further, it is  
15 preferable that the implants be surface demineralized prior to use by exposing them to acid or other demineralizing solutions.

20 Preferably, the bone should be surface demineralized prior to use.  
Where partially or surface demineralized bone is utilized, such bone can be obtained  
10 employing known demineralization techniques, e.g., those employing strong acids such as hydrochloric acid as described in Reddi et al., Proc. Nat. Acad. Sci. 69, pp. 1601-  
25 1605 (1972), the entire disclosure of which is incorporated herein by reference. The extent of demineralization is a function of the strength of the acid solution, the shape of  
30 the bone and the duration of the demineralization treatment as disclosed in  
15 Lewandrowski et al., J. Biomed. Materials Res., 31, pp. 365-372 (1996) the disclosure of which is incorporated by reference herein. The use of partially or surface  
35 demineralized bone is beneficial since such substances exhibit greater initial osteogenic and/or osteoinductive activity than fully mineralized bone.  
40

There is also disclosed a method of inserting the tabbed implant between  
20 adjacent vertebrae. The method involves forming a stepped bore between adjacent  
45 vertebrae, providing an intervertebral implant having a cylindrical body portion and at

5 least one pair of diametrically opposite radially extending tabs extending from the  
cylindrical body portion and inserting the implant between adjacent vertebrae such that  
10 the tabs are in alignment with the space defined between adjacent vertebrae. The  
method further includes positioning the implant such that the tabs are within the  
5 enlarged areas of the stepped bore and rotating the implant such that the tabs enter the  
15 enlarged or stepped area of the bore. This provides a greater ease of insertion over  
other styles of implants, such as, for example, threaded implants.

20 BRIEF DESCRIPTION OF THE DRAWINGS

Various preferred embodiments are described herein with reference to  
10 the drawings wherein:

25 FIG. 1 is a perspective view of one embodiment of the presently  
disclosed intervertebral implant;

30 FIG. 2 is a side view of the intervertebral implant shown in FIG. 1;

FIG. 3 is a top view of the intervertebral implant shown in FIG. 1;

15 FIG. 4 is a front view of the intervertebral implant shown in FIG. 1;

35 FIG. 5 is a side view of a long bone;

FIG. 6 is a perspective view of a ring cut from the long bone shown in

40 FIG. 5;

FIG. 7 is a side view of the ring shown in FIG. 6;

20 FIG. 8 is a perspective view of the ring after the top surface has been  
45 milled;

FIG. 9 is a perspective view of the ring after the bottom surface has been milled;

FIG. 10 is a perspective view of the ring after the side walls have been machined;

FIG. 11 is a perspective view of the ring after the radially extending wings have been machined to form tabs;

FIG. 12 is a an end view of the vertebral space with a stepped hole drilled therein;

FIG. 13 is a side view of the vertebral space shown in FIG. 12;

FIG. 14 is an end view of the vertebral space of FIG. 12 with one embodiment of the presently disclosed intervertebral implant inserted therein;

FIG. 15 is a perspective view similar to FIG. 14 with the intervertebral implant rotated 90°;

FIG. 16 is a side view of the intervertebral space similar to FIG. 13 with the intervertebral implant inserted and rotated 90°;

FIG. 17 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

FIG. 18 is a side view of the intervertebral implant shown in FIG. 17;

FIG. 19 is a top view of the intervertebral implant shown in FIG. 17;

FIG. 20 is a front view of the intervertebral implant shown in FIG. 17;

5

FIG. 21 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

10

FIG. 22 is a side view of the intervertebral implant shown in FIG. 21;

FIG. 23 is a top view of the intervertebral implant shown in FIG. 21;

15

5

FIG. 24 is a front view of the intervertebral implant shown in FIG. 21;

FIG. 25 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

20

FIG. 26 is a side view of the intervertebral implant shown in FIG. 25;

FIG. 27 is a top view of the intervertebral implant shown in FIG. 25;

25

10

FIG. 28 is a front view of the intervertebral implant shown in FIG. 25;

FIG. 29 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

30

FIG. 30 is a side view of intervertebral implant shown in FIG. 29;

FIG. 31 is a top view of the intervertebral implant shown in FIG. 29;

35

15

FIG. 32 is a front view of the intervertebral implant shown in FIG. 29;

FIG. 33 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

40

FIG. 34 is a side view of the intervertebral implant shown in FIG. 33;

FIG. 35 is a top view of the intervertebral implant shown in FIG. 33;

45

20

FIG. 36 is a front view of the intervertebral implant shown in FIG. 33;

50

55

5

FIG. 37 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

10

FIG. 38 is a side view of the intervertebral implant shown in FIG. 37;

FIG. 39 is top view of the intervertebral implant shown in FIG. 37;

15

5

FIG. 40 is a front view of the intervertebral implant shown in FIG. 37;

FIG. 41 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

20

FIG. 42 is a side view of the intervertebral implant shown in FIG. 41;

FIG. 43 is a top view of the intervertebral implant shown in FIG. 41;

25

10

FIG. 44 is a front view of the intervertebral implant shown in FIG. 41;

FIG. 45 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

30

FIG. 46 is a side view of the intervertebral implant shown in FIG. 45;

FIG. 47 is a top view of the intervertebral implant shown in FIG. 45;

35

15

FIG. 48 is a front view of the intervertebral implant shown in FIG. 45;

FIG. 49 is a perspective view of another embodiment of the presently disclosed intervertebral implant;

40

FIG. 50 is a side view of the intervertebral implant shown in FIG. 49;

FIG. 51 is a top view of the intervertebral implant shown in FIG. 49;

45

50

55

FIG. 52 is a front view of the intervertebral implant shown in FIG. 49;  
FIG. 53 is a perspective view of another embodiment of the presently  
disclosed intervertebral implant;

FIG. 54 is a side view of the intervertebral implant shown in FIG. 53;  
FIG. 55 is a top view of the intervertebral implant shown in FIG. 53;  
FIG. 56 is a front view of the intervertebral implant shown in FIG. 53;  
FIG. 57 is a perspective view of another embodiment of the presently  
disclosed intervertebral implant;

FIG. 58 is a side view of the intervertebral implant shown in FIG. 57;  
FIG. 59 is a top view of the intervertebral implant shown in FIG. 57;  
FIG. 60 is a front view of the intervertebral implant shown in FIG. 57;  
FIG. 61 is a perspective view of another embodiment of the presently  
disclosed intervertebral implant body portion with a rectangular cross-section;

FIG. 62 is a perspective view of another embodiment of the presently  
disclosed intervertebral implant body portion with an oval cross-section; and

FIG. 63 is a perspective view of another embodiment of the presently  
disclosed intervertebral implant body portion with a multi-sided cross-section.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Preferred embodiments of the presently disclosed intervertebral implant  
will now be described in detail with reference to the drawings, in which like reference  
numerals designate identical or corresponding elements in each of the several views.

5                   The spinal interbody fusion devices or intervertebral implants according  
to the present disclosure are intended to be placed between adjacent vertebrae in an  
10                   attempt to correct a debilitating degeneration of the spinal structure. In humans, the  
device may be used predominantly in the lumbar region of the spine, but is adjustable  
5                   for use in the thoracic and cervical regions as well. When in place, the device supports  
15                   and maintains an appropriate distance between vertebrae and causes bone tissue to form  
and become integral with the device. Consequently, the intervertebral space becomes  
20                   filled with autologous bone tissue and forms an integral rigid bone construction  
between adjacent vertebrae. While the disclosed implants and methods are discussed in  
10                   terms of humans, it is contemplated that the disclosed implants and methods may find  
25                   beneficial use in veterinary applications.

                  The disclosed intervertebral implants are formed with a tabbed  
30                   configuration which allows the implants to be inserted between the vertebrae and  
twisted or rotated to secure the implant in position between the vertebrae. This has the  
15                   resultant benefits of reduced likelihood of expulsion. Furthermore, the implants  
35                   disclosed herein also allow insertion of the implant between the vertebral space without  
excessive distraction between the vertebrae.

                  Referring now to FIGS. 1-4, there is illustrated one embodiment of the  
40                   presently disclosed intervertebral implant shown generally as 10. Briefly,  
20                   intervertebral implant 10 includes a substantially cylindrical body portion 12 having a  
45                   pair of diametrically opposed and radially extending tabs 14 and 16. Cylindrical body



5 portion 12 has a first end 18 and a second end 20. Tab 14 has first and second  
engaging or retaining surfaces 22a and 22b which are stepped or longitudinally spaced  
10 a predetermined distance from first end 18 and second end 20, respectively. Similarly,  
tab 16 has a pair of retaining surfaces 24a and 24b which are similarly stepped or  
5 longitudinally spaced from a first end 18 and second end 20 respectively. Retaining  
15 surfaces 22a, 22b and 24a, 24b are configured to engage a portion of adjacent vertebrae  
when installed therebetween.

20 As shown, tabs 14 and 16 extend only along a limited extent of the  
circumference of a cylindrical body portion 12. Preferably, tabs 14 and 16 are radially  
10 spaced 180° apart. Tab 14 includes a rounded side surface 26 and tab 16 includes a  
25 rounded side surface 28.

As shown, implant 10 includes a throughbore 30 which has a  
30 longitudinal axis substantially perpendicular to the longitudinal axis of implant 10.  
Further, implant 10 may be provided with perforations instead of, or in addition to,  
15 throughbore 30. Where implant 10 is formed of bone, the perforations assist in  
35 facilitating biological attachment and eventual incorporation of the implant into adjacent  
vertebrae.

40 Implant 10 further includes an installation slot 32 machined or milled in  
first end 18. A second bore 34 extends between slot 32 and throughbore 30. Second  
20 bore 34 is provided for mating of the implant with an insertion tool. Throughbore 30  
45 is dimensioned to receive bone particles and/or biocompatible osteoinductive or

5 osteoconductive material. These materials may include cancellous bone, cancellous bone particles, ceramics, polymers, composites, BMP, etc.

10 Intervertebral implant 10 can be constructed from a broad range of biocompatible materials such as, for example, surgical stainless steel, titanium,  
15 5 ceramic, hydroxyapatite, polymer, carbon fiber, tantalum, etc. Preferably, implant 10 is constructed from a human and/or animal cadaver bone. Intervertebral implant 10, appropriately sized, can be used in cervical, thoracic and lumbar spinal fusion  
20 procedures. For cervical spinal fusion procedures, in which implants are typically between 8 to 15 mm in length and 10 to 14 mm in diameter, bone is preferably  
25 10 obtained from the fibula, radius, ulna or humerus bones. For thoracic and lumbar spinal fusion procedures in which implants are typically 10 to 30 mm in length and/or  
30 diameter and about 10 to 14 mm in height, bone is preferably obtained from the humerus, femur or tibia. The sources of cortical bone for the bone-derived implant are preferably allogenic but also include xenogenic sources such as bovine and porcine  
35 15 bone.

Additionally, the bone may be subjected to penetration with osteogenic or demineralization agents during manufacture of the implant.

40 Alternatively, as discussed above, intervertebral implant 10 can be molded or machined from other biocompatible materials including composites made of  
20 bone as discussed in U.S. Patent No. 5,899,939 to Boyce et al., the entire disclosure of which is incorporated by reference herein.  
45

5 Referring now to Figs. 5-11, in one preferred embodiment,  
intervertebral implant 10 is manufactured in accordance with the procedure disclosed in  
10 U.S. Patent Application filed on even date herewith under Certificate of Express Mail  
Label No. EL260888080US and entitled, "Intervertebral Implant", the entire disclosure  
15 of which is incorporated by reference herein. In general, implant 10 is manufactured  
from a ring C formed by making transverse cuts through a long bone D along lines A  
and B as illustrated in FIG. 5. Next, the top 36 of ring C is machined using a milling  
20 device (not shown) having a dome or crown configuration to shape one side of ring C  
to have a semi-cylindrical portion 38 with two radially extending flats 40 (Fig. 8).  
10 Ring C is flipped over and the same milling procedure is formed on a bottom 42 of  
25 ring C as shown in Fig. 9. Next, the front and side surfaces are machined to flatten the  
side surface to reconfigure femoral ring C to have a generally rectangular configuration  
30 (Fig. 10). Finally, tabs 14 and 16 are formed by machine flats 40 so as to provide  
stepped surfaces from first and second ends 18 and 20 (Fig. 11). Additionally, further  
15 milling may be performed to provide rounded side surfaces 26 and 28 on tabs 14 and  
35 16 respectively. It should be noted that throughbore 30 may be formed from a  
medullary canal through the long bone and further milled to provide a uniform  
40 throughbore 30 through ring C. While not shown, first end 18 may be further milled  
and/or drilled to provide installation slot 32 and bore 34 extending between installation  
20 slot 32 and an interior of throughbore 30. As discussed above, intervertebral implant  
45 10 need not be formed from cadaveric bone but rather may be formed from any

5 biocompatible material. As such, other known processes, such as molding techniques may be used to manufacture the implant.

10 Installation of implant 10 between a pair of adjacent vertebrae will now be described. Referring to Figs. 12-16 and initially to Figs. 12-13, there is illustrated  
5 a pair of adjacent vertebrae X and Y defining intervertebral space Z therebetween. The  
15 endplate is stronger bone than is the cancellous core. Thus, cuts in the vertebral bodies permit the tabs of the implant to extend past the endplate and into the softer bone  
20 beneath. A camming approach for some of the following disclosed embodiments of the implant tabs allows the cancellous bone to be compressed against the implant thereby  
10 providing additional frictional resistance against implant movement. A drill or other  
25 known devices and methods are utilized to form a stepped hole or bore E between the adjacent vertebrae preferably by milling or machining. Examples of such devices and  
30 procedures are disclosed in U.S. Patent No. 5,445,639, the entire disclosure of which is incorporated by reference herein. Stepped hole E preferably has narrow diameter  
15 portion F adjacent the outer surface of the vertebrae and enlarged portion G interior to  
35 the vertebrae. In preparation for use, intervertebral implant 10 may be demineralized as discussed hereinabove and mounted on suitable installation devices.

40 Referring now to Fig. 14, once installed on an insertion device, intervertebral implant 10 is inserted between vertebrae X and Y such that tabs 14 and  
20 16 are aligned with the intervertebral space Z. Intervertebral implant 10 is inserted  
45 into the drilled hole a sufficient distance such that tabs 14 and 16 align with the

5 enlarged portion G of bore E. Implant 10 is subsequently rotated approximately 90°  
such that tabs 14 and 16 rotate into enlarged portion G. As noted above, retaining  
10 surfaces 22a and 22b on tab 14 and retaining surfaces 24a and 24b on tab 16 engage  
edges of enlarged portion G of bore E and prevent expulsion of the implant from  
5 between the adjacent vertebrae A and B. It should be noted that the entire procedure  
15 may be accomplished without any substantial or excessive distraction between adjacent  
vertebrae. While the present disclosure provides installation slot 37 and bore 32 for  
20 receipt of an installation device, it is within the contemplated scope of the present  
disclosure to provide implant 10 with other structure to allow insertion and rotation of  
10 the implant by various insertion tools.

25 Referring now to FIGS. 17-19, there is disclosed an alternative  
embodiment of an intervertebral implant. Intervertebral implant 50 is similar to  
30 implant 10 described above and generally includes cylindrical body portion 52 having a  
throughbore 54 formed therein. An installation slot 56 is provided in a first end 58 and  
15 a bore 60 extends from slot 56 to the interior of throughbore 54 similar to that  
35 described above with respect to implant 10.

Implant 50 includes a pair of radially extending first tabs 62 and 64  
40 adjacent to, and longitudinally displaced from, first end 58 and a pair of second tabs 66  
and 68 adjacent to, and longitudinally spaced from, a second end 70 of cylindrical body  
20 portion 52. Thus, first tabs 62 and 64 as well as second tabs 66 and 68 are stepped  
45 from first and second ends 58 and 70 respectively. First tabs 62 and 64 include

engaging surfaces 62a and 64a for engaging an edge of stepped bore in a drilled vertebrae. Similarly, second tabs 66 and 68 also include engaging surfaces 66a and 68a for engaging an interior of a bore drilled in bone or vertebrae. Similar to that disclosed with regard to implant 10, first tabs 62 and 64 as well as second tabs 66 and 68 may have a generally rounded profile.

Intervertebral implant 50 is formed in the manner disclosed above with respect to implant 10 and is similarly installed in a stepped bore drilled in adjacent vertebrae. The stepped bore may have only a single enlarged area or may include two separate enlarged areas to accommodate the first and second tabs as the intervertebral implant is rotated into place.

Referring now to FIGS. 21-24, there is disclosed another alternate embodiment of an intervertebral implant similar to that of implant 50. Intervertebral implant 80 includes a generally cylindrical body portion 82 having a throughbore 84 formed therethrough. An installation slot 86 is provided along with a bore 88 extending between installation slot 86 and an interior of throughbore 84. Implant 80 includes a pair of radially extending first tabs 90 and 92 as well as a pair of radially extending second tabs 94, 96. In contrast to implant 50, first tabs 90, 92 and second tabs 94, 96 are formed on cylindrical body portion such that they are generally perpendicular to slot 86 and are adjacent to throughbore 84.

In the presently disclosed embodiments where the tabs are adjacent to the throughbore, a different method of forming the implant from bone is necessary.

5 The bone will initially be cut parallel to the long axis of the long bone to permit the  
tabs to extend in a plane that transects the medullary canal. Subsequently, the presently  
10 disclosed methods of milling or machining the bone are performed to form the body  
portion and tabs. An installation shaft and bore between the installation slot and  
5 throughbore may be formed.

15 Referring now to FIGS. 25-28, there is disclosed another embodiment of  
an intervertebral implant which includes specific wedging structure to prevent the  
20 implant from moving longitudinally within a bore. Implant 100 generally includes a  
cylindrical body portion 102 having a throughbore 104 formed therein. Similar to  
10 previous embodiments, implant 100 is provided with an installation slot 106 and a bore  
25 108 extending between installation slot 106 and throughbore 104. Implant 10 also  
includes a pair of radially extending first anterior tabs 110, 112 and a pair of radially  
30 extending second tabs 114, 116. As shown, first tabs 110 and 112 have curved wedge  
surfaces 118, 120. Similarly, second tabs 114 and 116 also include curved wedge  
15 surfaces 122 and 124. Wedge surfaces 118 and 120 of first tabs 110 and 112 curve  
35 away from a first end 126 of implant 10 and wedge surfaces 122, 124 of second tabs  
114 and 116 curve away from a second end 128 of implant 100. The provision of  
40 wedge surfaces on the tabs provides a range of camming contact with the interior of a  
stepped bore drilled in adjacent vertebrae to thereby prevent expulsion of the implant.

20 Referring now to FIGS. 29-32, there is disclosed a further alternate  
45 embodiment of an intervertebral implant which includes progressive, radial camming

5 structure which, upon rotation of the implant, cams the implant into position within a stepped bore. Specifically, intervertebral implant 130 includes a cylindrical body  
10 portion 132 having a throughbore 34 formed therethrough. An installation slot 136 may be provided along with a bore 138 extending between installation slot 136 and  
5 throughbore 134. Implant 130 additionally includes first tabs 140 and 142 formed  
15 adjacent first end 144 and second tabs 146 and 148 formed adjacent a second end 150. As illustrated, first tabs 140 and 142 as well as second tabs 146 and 148 have a  
20 generally, progressively curved shape such as a spline shape or one defined by a polynomial-defined curve. Thus, first tabs 140, 142 include progressive camming  
10 surfaces 152, 154. Second tabs 146 and 148 include progressive camming surfaces 156  
25 and 158. Implant 130 may be formed in a manner similarly described above with respect to implant 10.

30 Upon installation of implant 130, between adjacent vertebrae, implant 130 is rotated and progressive camming surfaces 152, 154 and 156, 158 engage walls  
15 of the stepped bore in progressive fashion to firmly wedge implant 130 within the stepped bore and prevent any loosening or further rotation or reverse rotation of  
35 implant 130 within the stepped bore. The provision of progressive camming surfaces allows for the use of implant 130 in bores which may not have been drilled precisely or  
40 to a constant/consistent diameter. Further, as noted above, camming structure on the disclosed implants allows the tabs to compress the spongy bone to gain additional  
20 frictional force to secure the implant between the vertebrae.  
45



5 Referring now to FIGS. 33-36, there is disclosed another alternate  
embodiment of an intervertebral implant including camming surfaces provided on tabs  
10 so as to allow the implant to be cammed within a stepped bore formed in adjacent  
vertebrae upon rotation of the implant. Specifically, implant 160 includes a cylindrical  
5 body portion having a throughbore 164 and installation slot 166 and a bore 168  
15 extending between installation slot 166 and throughbore 164. A pair of radially  
extending first tabs 170, 172 and a pair of radially extending second tabs 174, 176 are  
20 formed on cylindrical body portion 162. First tabs 170 and 172 have relatively flat  
camming surfaces 178 and 180, respectively, formed thereon, while second tabs 174,  
10 176 also include relatively flat camming surfaces 182, 184, respectively, formed  
25 thereon. As with implant 130, rotation of implant 160 within a stepped bore causes the  
camming surfaces 178, 180 and 182, 184 to engage sidewalls of the stepped bore and  
30 cam the implant therein to prevent further rotation. As with all prior embodiments,  
first tabs 170 and 172 also include camming surfaces 170a, 172a and second tabs 174,  
15 176 include camming engaging surfaces 174a, 176a to engage edges of stepped bore  
35 and prevent expulsion of the implant after it has been rotated into position within the  
stepped bore.

40 Referring now to FIGS. 37-40, there is disclosed a further alternate  
embodiment of an intervertebral implant. Intervertebral implant 190 generally includes  
20 a cylindrical body portion 192 having a throughbore 194. Implant 190 includes first  
45 tabs 196 and 198 spaced a predetermined distance from first end 200 of cylindrical

5 body portion 192. Implant 190 additionally includes second tabs 202 and 204

positioned adjacent and spaced a distance from second end 206 of cylindrical body

10 portion 192. Implant 190 includes camming structure formed on the first and second tabs which permits rotation of the implant in either direction upon installation.

5 Specifically, first tabs 196 includes opposed inclined camming surfaces 208a and 208b and first tab 198 also includes opposed inclined camming 210a and 210b. Similarly,

15 second tab 202 includes opposed inclined camming surfaces 212a and 212b and second

20 tab 204 includes opposed inclined camming surfaces 214a and 214b. The opposed inclined camming surfaces allow the implant to be rotated in either direction and still

10 achieve a camming function within a stepped bore. As with prior embodiments, first tabs 196 and 198 include bore engaging surfaces 196a and 198a respectively.

25 Similarly, second tabs 202 and 204 include bore engaging surfaces 202a and 204a respectively. Implant 190 may preferably be provided with an installation slot 216 and a bore 218 extending between slot 216 and throughbore 194.

15 Referring now to FIGS. 41-44, there is disclosed a further alternate embodiment of an intervertebral implant. Implant 220 generally includes cylindrical body portion 222 having a throughbore tube 224 defined therein. First tabs 226 and 228 and second tabs 230 and 232 extend radially from cylindrical body portion 222.

35 The first and second tabs of implant 220 include threaded structure which allows the implant to engage precut threads in a stepped bore formed between adjacent vertebrae

40 or to act as teeth to cut into bone and thereby secure implant 220 within a stepped bore

45

5 between adjacent vertebrae. Alternatively, the tabs may be grooved but not necessarily threaded. Specifically, first tab 226 includes a threaded surface 234 and first tab 228  
10 includes a threaded surface 236. Similarly, second tab 230 includes a threaded surface 238 and second tab 232 includes a threaded surface 240. It should be noted that the  
5 number of threads on any individual tab may differ from the number on an adjacent or diametrically opposed tab. Preferably, an installation slot 242 is provided having a  
15 bore 244 extending between slot 242 and into throughbore 224.

20 Referring now to Figs. 45-48, there is disclosed an asymmetrical embodiment of an intervertebral implant. Implant 250 generally includes a cylindrical  
10 body portion 252 having a first end 254 and a second end 256. A throughbore 258  
25 extends through implant. A first tab 260 is provided a predetermined spaced distance from first end 254 and a second tab 262 is provided a predetermined spaced distance  
30 from second end 256. As shown, first and second tabs 260, 262 are radially spaced approximately 180°. First and second tabs 260, 262 may be of any of the previously  
15 described shapes in the prior embodiments and include respective camming and/or  
35 abutment bone engaging surfaces. Additionally, implant 250 may be provided with an installation slot 269 and a bore 266 and be formed in accordance with the previously  
40 described methods and of same or similar materials.

20 Referring now to Figs. 49-52, there is disclosed an intervertebral implant 270 designed to utilize a plug, which may be formed from cortical bone, to  
45 form the tabs. Implant 270 generally includes a cylindrical body portion 272 formed in

5 accordance with the above described method such that the medullary canal provides a  
throughbore 274 in implant 270. A cortical plug 276 formed by turning on a lathe,  
10 milling, or other appropriate machining process. Plug 276 is positioned within  
throughbore 274 which may be suitably drilled or otherwise prepared to receive plug  
15 276 such that first and second ends 278, 280 of cortical plug 276 extend radially  
outward from body portion 272. First and second ends 278, 280 thus form tabs which,  
when installed by the above described method, engage edges of a stepped bore formed  
20 in adjacent vertebrae. An installation slot 282 may be formed in an end 284 of body  
portion and a bore 286 extends between slot 282 and throughbore 274.

10 Referring now to Figs. 53-56, there is disclosed an alternate embodiment  
25 of an intervertebral implant with a substantially shortened body portion. Implant 290 is  
designed to be provided in various diameters such that two or more implants 290 of  
30 differing diameters may be used together to introduce the appropriate lordosis into the  
spine. Implant 290 generally is similar to the above described implants except that the  
15 length of a cylindrical body portion 292 is substantially abbreviated or shortened.  
35 Implant 290 may include any of the previously described versions of tabs and  
preferably first and second tabs 294, 296. Implant 290 may also include an installation  
40 slot 298 and bore 300 extending between slot 298 and end face 302 of body portion  
292. However, it is not contemplated that implant 290 have a throughbore and thus  
20 implant 290 may be formed from bone extending up to, but not including, the  
45

5 medullary canal of a long bone. Further, various body portion configurations, such as, for example, tapered, semi-conical, etc. are also envisioned.

10 Referring now to Figs. 57-60, there is disclosed another embodiment of an intervertebral implant. Implant 310 generally includes a tapered cylindrical body portion 312 having a first end 314 and a second end 316. The diameter of first end 15 314 is smaller than the diameter of second end 316. Implant 310 may be formed by the disclosed method and include a throughbore 318, an installation slot 320 and a bore 322 extending from slot 320 to throughbore 318. Additionally, implant includes first 20 tabs 324, 326 and second tabs 328, 330.

10 As best shown in FIGS. 61-63, various body portions other than 25 cylindrical are within the contemplated scope of the present disclosure. These body portions may include a body portion 340, having a rectangular cross-section (FIG. 61), 30 a body portion 350 having an oval cross-section (FIG. 62), a body portion 360 having a multi-sided cross-section (FIG. 63), etc. The embodiments disclosed in FIGS. 61-63 15 may obviously include structure similar or identical to that provided in previously 35 described embodiments such as, for example, throughbores, installation slots, bore and all the various configurations and orientations of tabs.

40 It will be understood that various modifications may be made to the embodiments disclosed herein. For example, differing or alternate tab constructions 20 may be provided on a single implant. Additionally, the various configurations may be 45 combined on individual tabs. Therefore, the above description should not be construed

5

as limiting, but merely as exemplifications of preferred embodiments. Those skilled in  
the art will envision other modifications within the scope and spirit of the claims  
appended hereto.

10

15

20

25

30

35

40

45

50

55

**Claims**

5

10

15

20

25

30

35

40

45

50

55

5

WHAT IS CLAIMED IS:

10

1. An intervertebral implant comprising:

a substantially cylindrical body portion having a first end and a second end; and

15

5 at least two tabs extending radially outward from the substantially cylindrical body portion, each of the at least two tabs being longitudinally displaced from the first and second ends.

20

2. An intervertebral implant according to claim 1, wherein the at least two tabs include a first tab and a second tab, the first tab being radially spaced

25

10 approximately 180° about the substantially cylindrical body portion from the second tab.

30

3. An intervertebral implant according to claim 2, wherein the first tab is longitudinally spaced along the substantially cylindrical body portion from the second tab.

35

15 4. An intervertebral implant according to claim 1, wherein the substantially cylindrical body portion has a longitudinal axis and at least one throughbore defined in the substantially cylindrical body portion, the throughbore having a central axis which is substantially perpendicular to the longitudinal axis of the substantially cylindrical body portion.

40

20 5. An intervertebral implant according to claim 1, wherein said substantially cylindrical body portion has a maximum diameter, and each tab of the at

45

50

55



5 least two tabs has a width less than or equal to the maximum diameter of the substantially cylindrical body portion.

10 6. An intervertebral implant according to claim 1, wherein said substantially cylindrical body portion defines an installation slot in one end thereof.

15 5 7. An intervertebral implant according to claim 4, wherein said substantially cylindrical body portion defines an installation slot in one end thereof and a bore extending between the slot and the throughbore.

20 8. An intervertebral implant according to claim 4, wherein the at least two tabs are radially spaced from the throughbore.

25 10 9. An intervertebral implant according to claim 1, wherein the at least two tabs include a pair of radially opposed first tabs and a pair of radially opposed second tabs.

30 10. An intervertebral implant according to claim 1, wherein each tab of the at least two tabs has a wedge-shaped surface.

35 15 11. An intervertebral implant according to claim 1, wherein each tab of the at least two tabs has a camming surface.

40 12. An intervertebral implant as claimed in claim 11, wherein each camming surface is flat.

45 20 13. An intervertebral implant as claimed in claim 11, wherein each camming surface includes opposed inclined camming surfaces.

5

14. An intervertebral implant according to claim 11, wherein each tab of the at least two tabs has a profile that defines a progressive camming surface.

10

15. An intervertebral implant according to claim 1, wherein each tab of the at least two tabs includes a threaded bone engaging surface.

15

5 16. An intervertebral implant according to claim 1, wherein the substantially cylindrical body portion defines a throughbore and each tab of the at least two tabs is an end of a plug positioned through the throughbore.

20

17. An intervertebral implant according to claim 1, wherein the substantially cylindrical body portion is tapered.

25

10 18. The intervertebral implant according to claim 1, wherein the implant is formed from a biocompatible material.

30

19. The intervertebral implant according to claim 18, wherein the implant is formed of bone.

35

15 20. The intervertebral implant according to claim 19, wherein the bone is animal bone.

21. The intervertebral implant according to claim 19, wherein the bone is human.

40

22. The intervertebral implant according to claim 19, wherein the bone is surface demineralized.

45

20 23. A method of installing an intervertebral implant between adjacent vertebrae comprising the steps of:

50

55

5 providing an intervertebral implant having a substantially cylindrical  
body portion and at least two tabs extending radially from the body portion;

10 forming a stepped bore in a portion of two adjacent vertebrae, the  
stepped bore having an enlarged diameter area and a reduced diameter area;

15 5 aligning the at least two tabs with a space defined between the adjacent  
vertebrae;

20 inserting the implant into the space a sufficient distance such that the at  
least two tabs are positioned adjacent the enlarged diameter area of the bore; and

rotating the implant to position the tabs within the enlarged diameter area  
10 of the bore.

25 24. An intervertebral implant comprising:

a body portion having a first end and a second end; and

30 at least two tabs extending radially outward from the body portion, each  
of the at least two tabs being longitudinally displaced from the first and second ends.

15 25. The intervertebral implant according to claim 24, wherein the body  
portion has a substantially rectangular cross-section.

26. The intervertebral implant according to claim 24, wherein the body  
40 portion has a substantially oval cross-section.

27. The intervertebral implant according to claim 24, wherein the body  
20 portion has a substantially multi-sided cross-section.

1/15

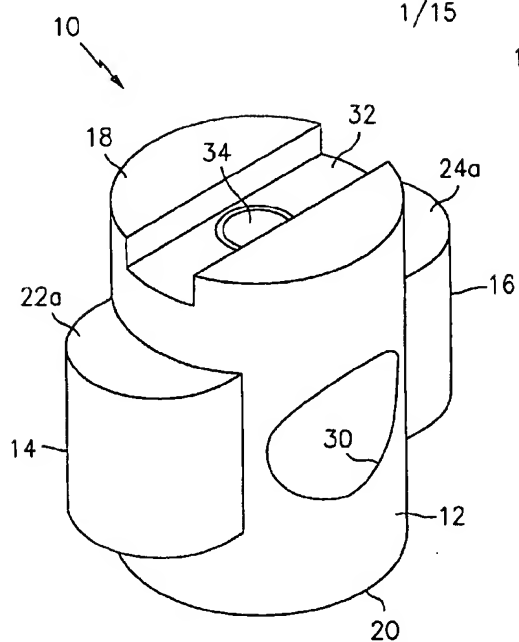


FIG. 1

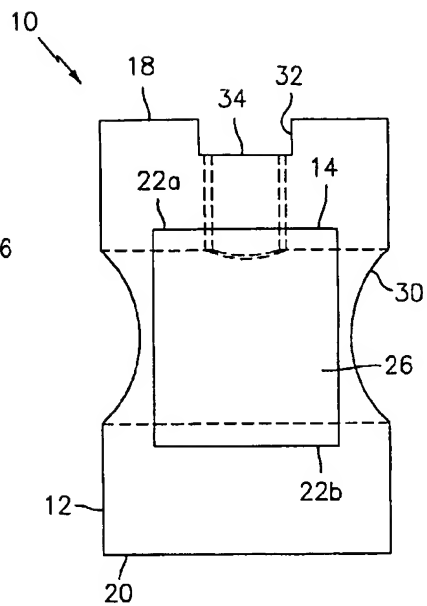


FIG. 2

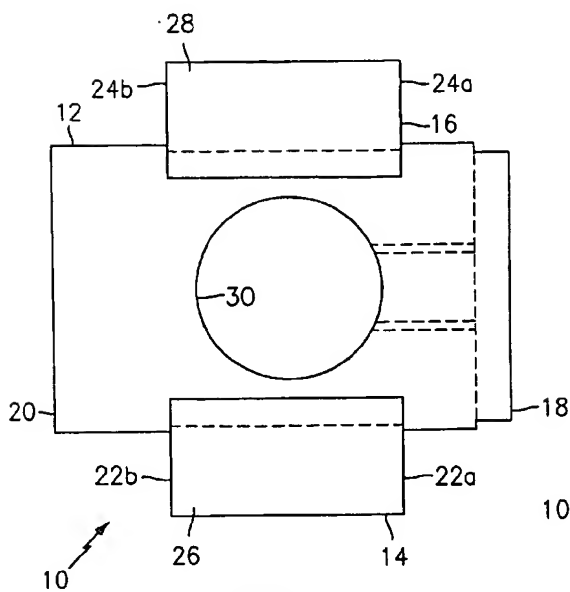


FIG. 3

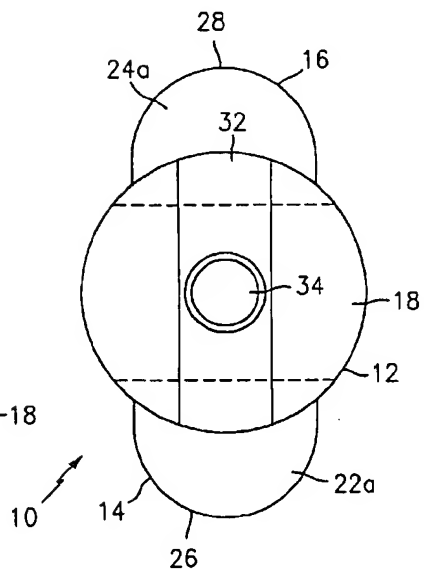


FIG. 4

2/15

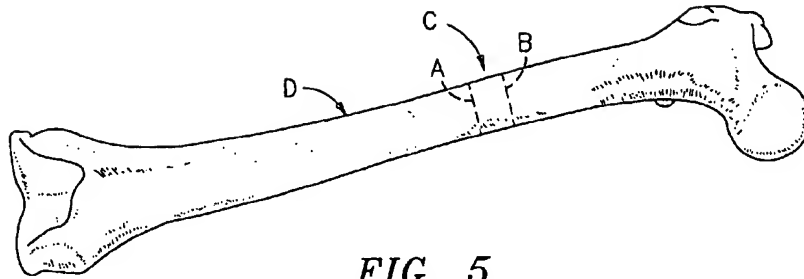


FIG. 5




FIG. 6




FIG. 7




FIG. 8




FIG. 9




FIG. 10

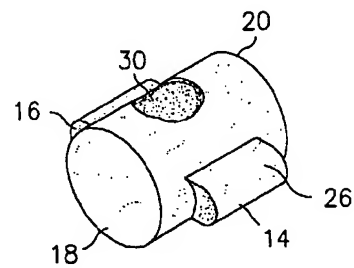


FIG. 11

3/15

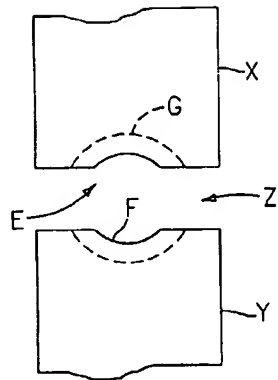


FIG. 12

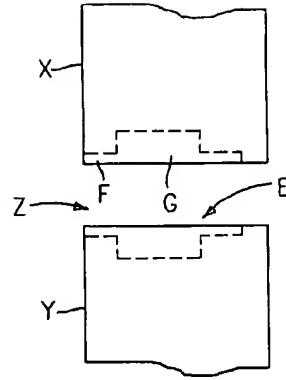


FIG. 13

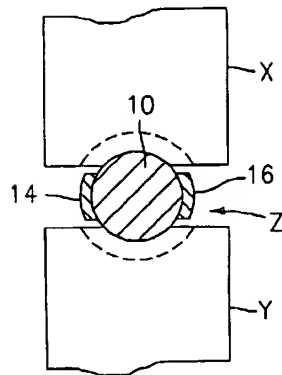


FIG. 14

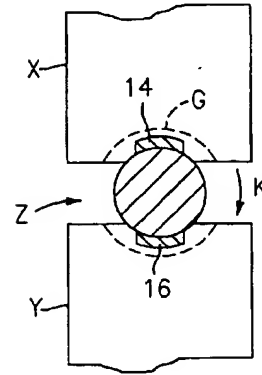


FIG. 15

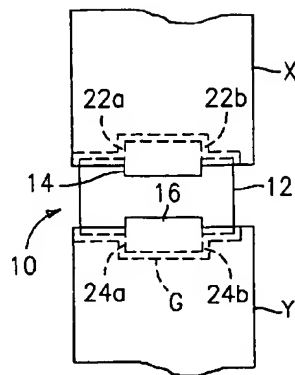


FIG. 16

SUBSTITUTE SHEET (RULE 26)

4/15

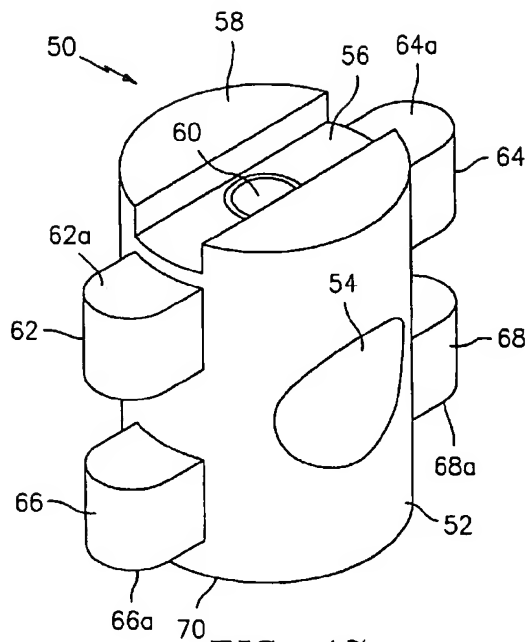


FIG. 17

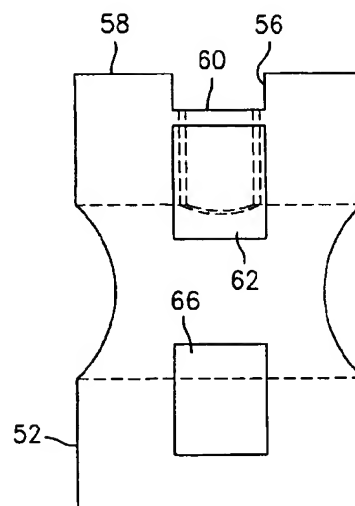


FIG. 18

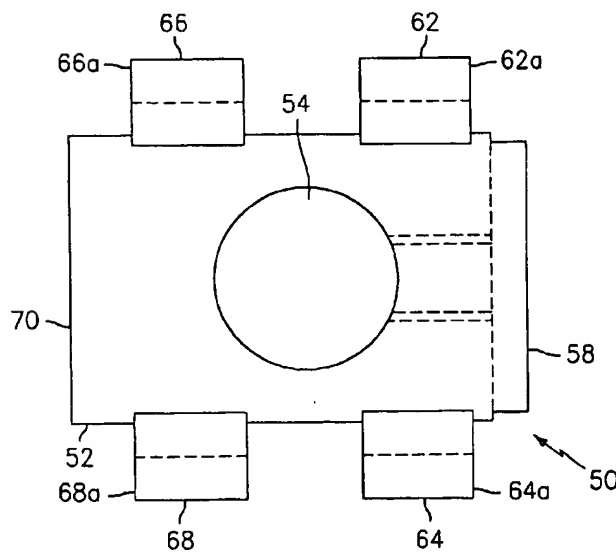


FIG. 19

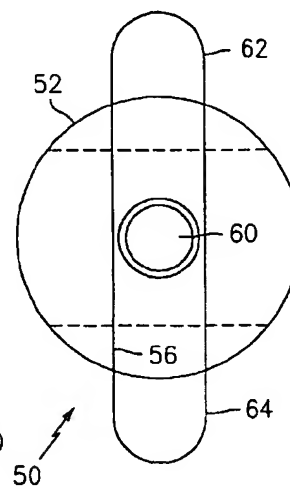


FIG. 20

5/15

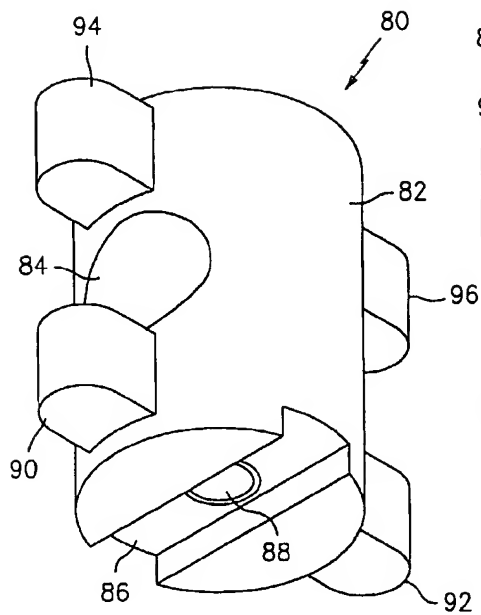


FIG. 21

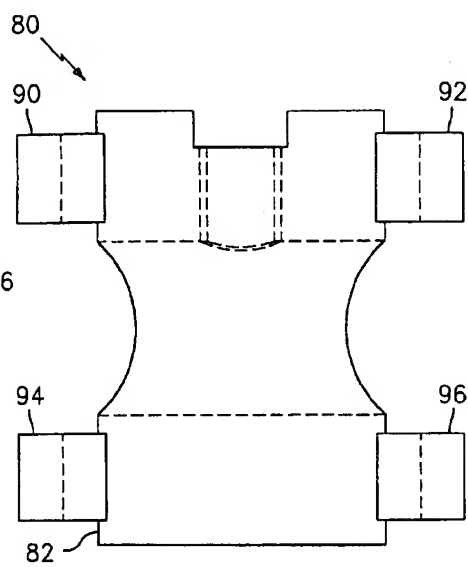


FIG. 22

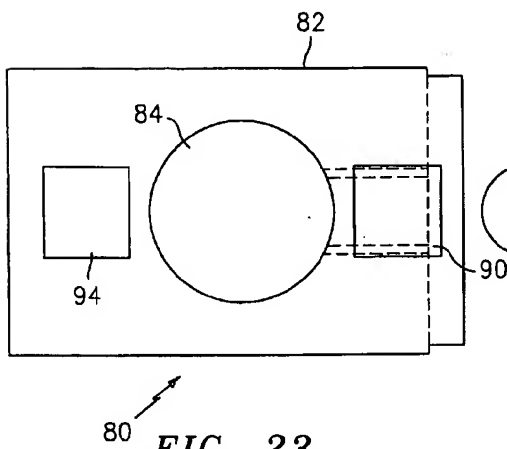


FIG. 23

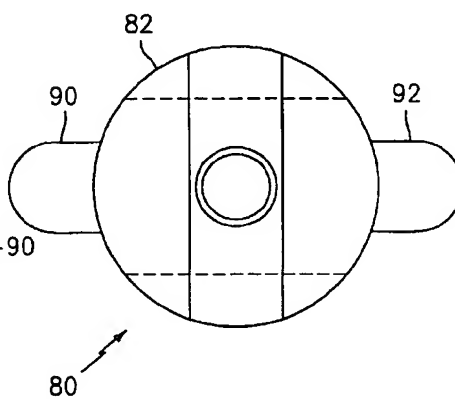


FIG. 24



6/15

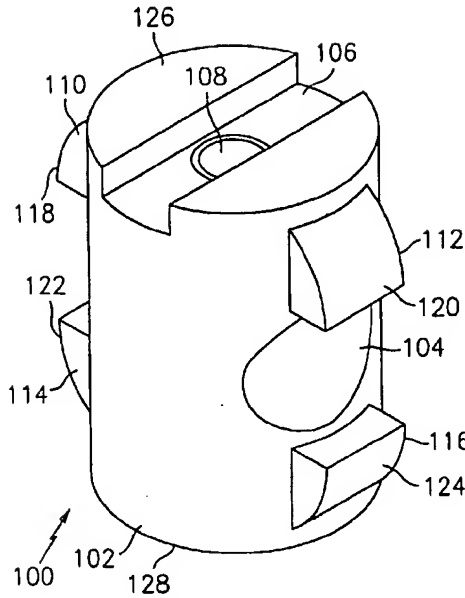


FIG. 25

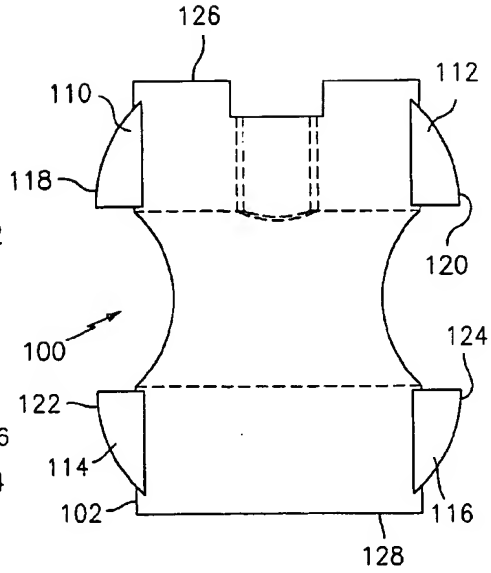


FIG. 26

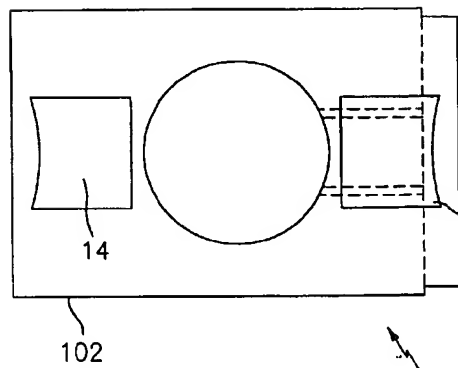


FIG. 27

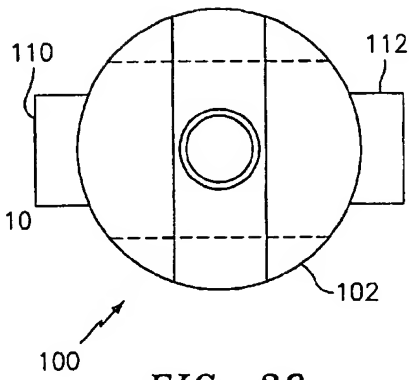


FIG. 28

7/15

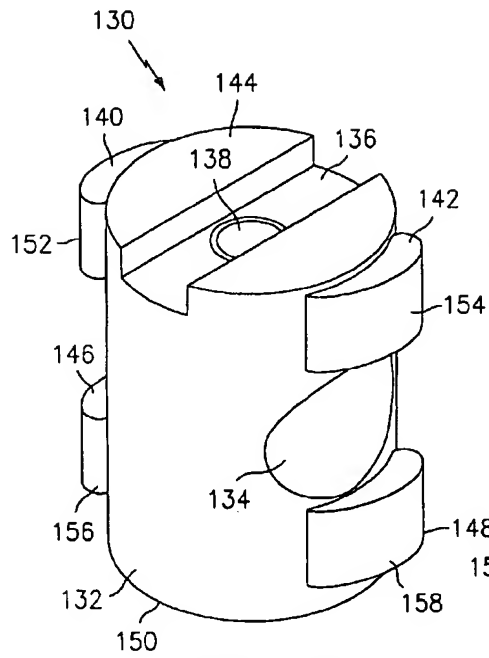


FIG. 29

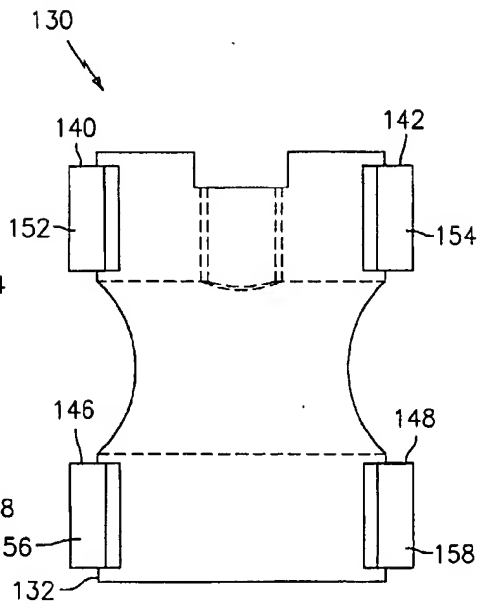


FIG. 30

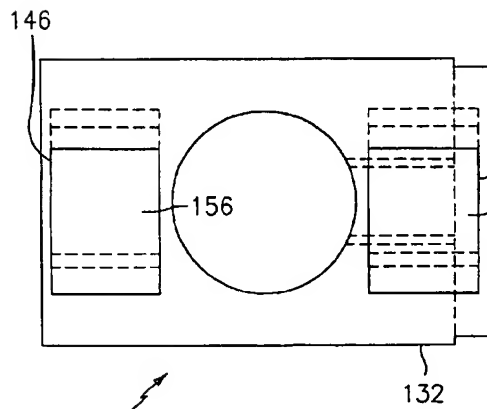


FIG. 31

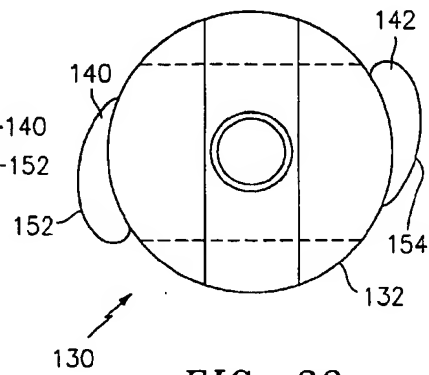


FIG. 32

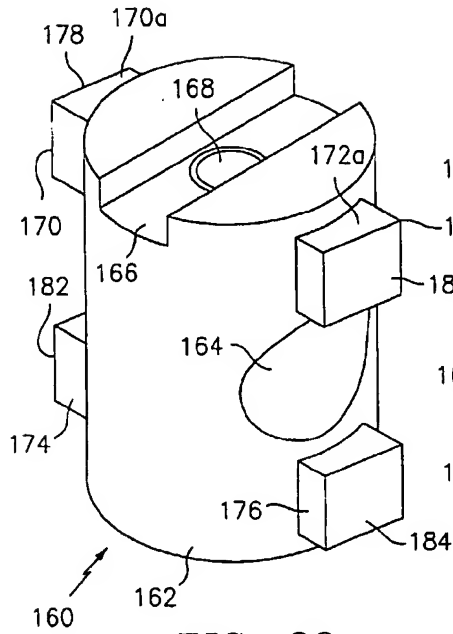


FIG. 33

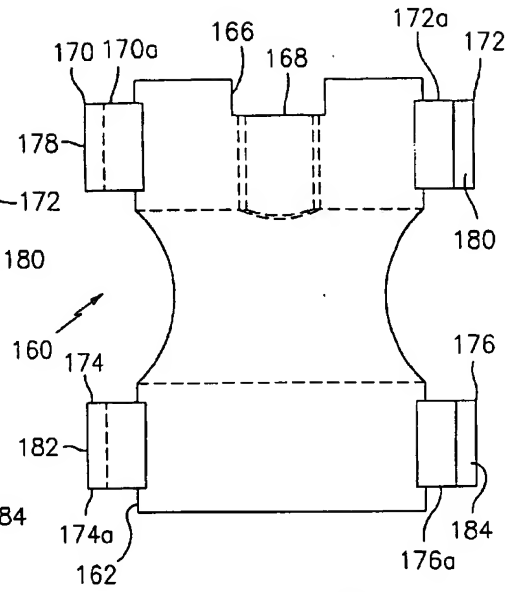


FIG. 34

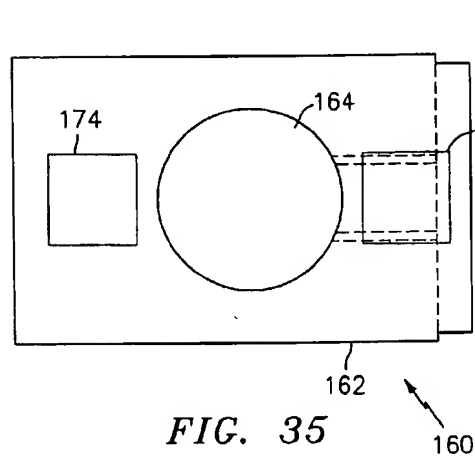


FIG. 35

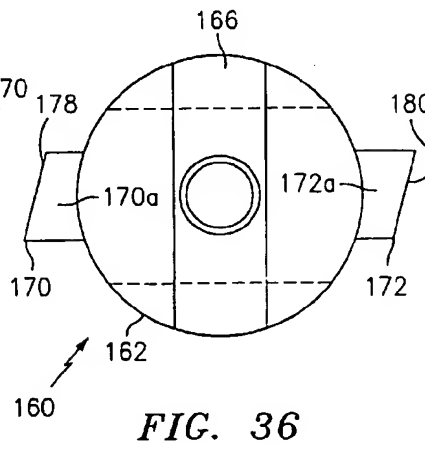


FIG. 36

9/15

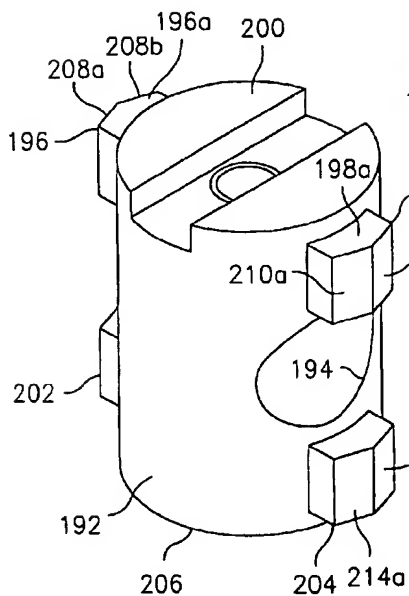


FIG. 37

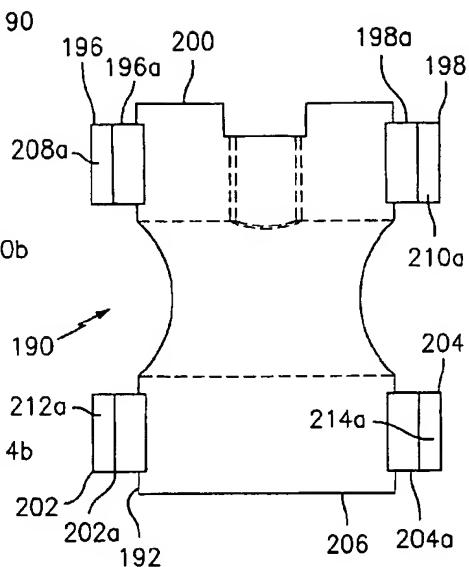


FIG. 38

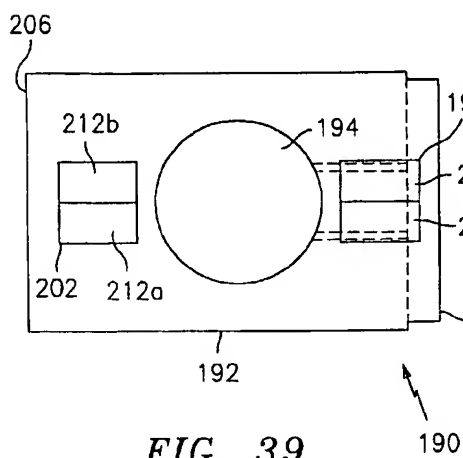


FIG. 39

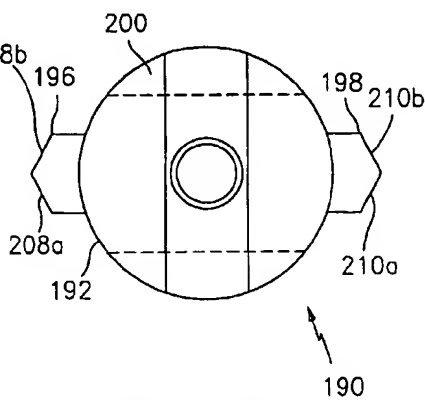


FIG. 40

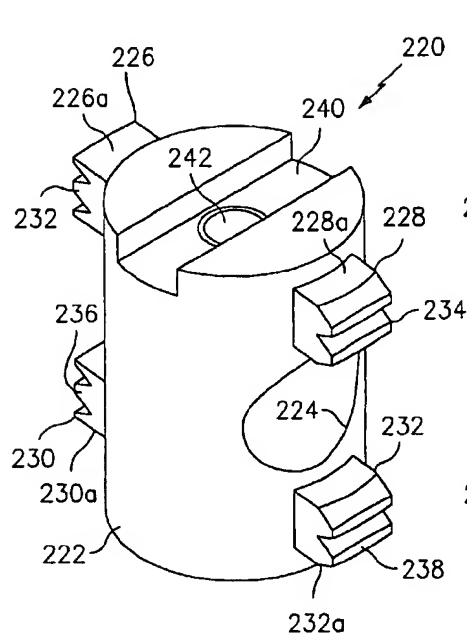


FIG. 41

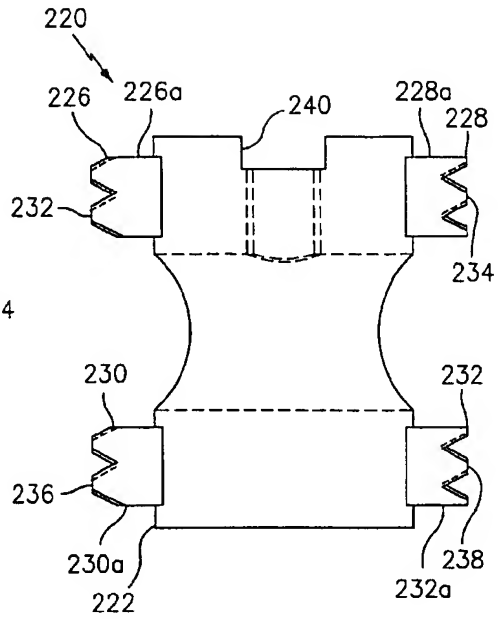


FIG. 42

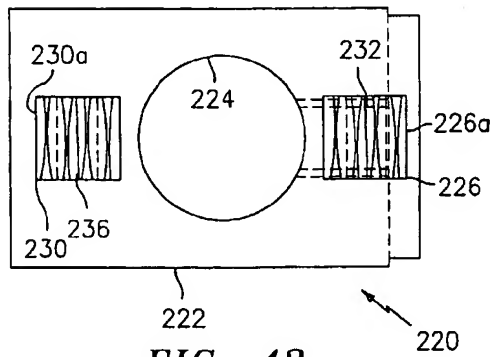


FIG. 43



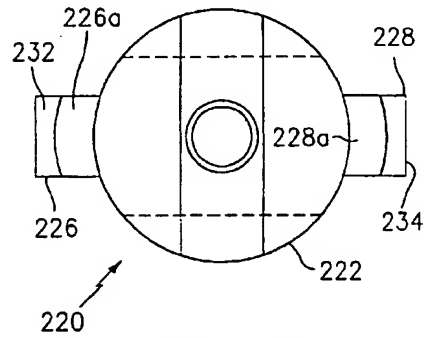



FIG. 44

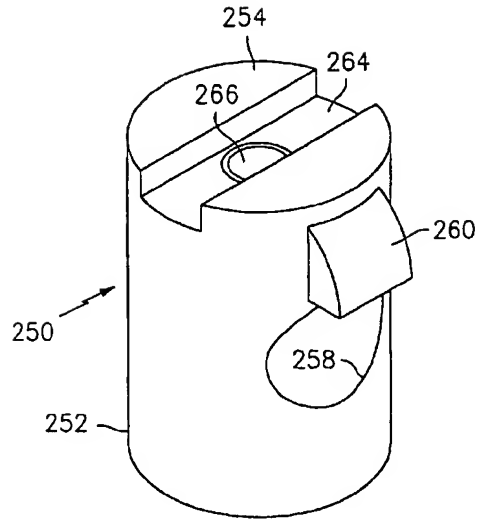


**FIG. 45**

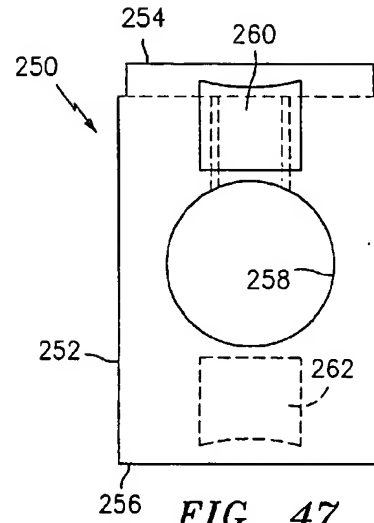

**FIG. 47**

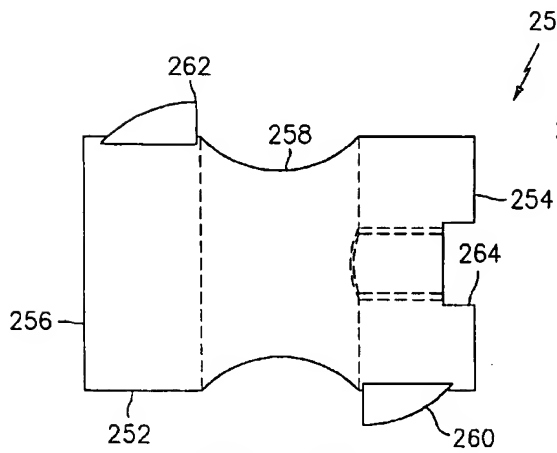

**FIG. 46**

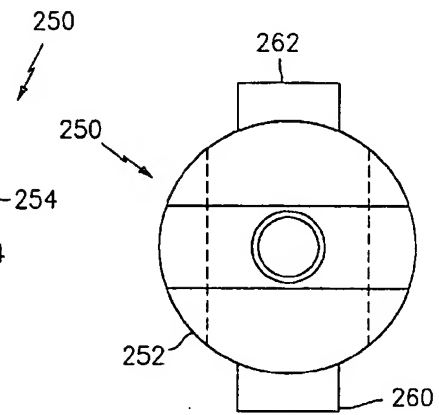

**FIG. 48**

12/15

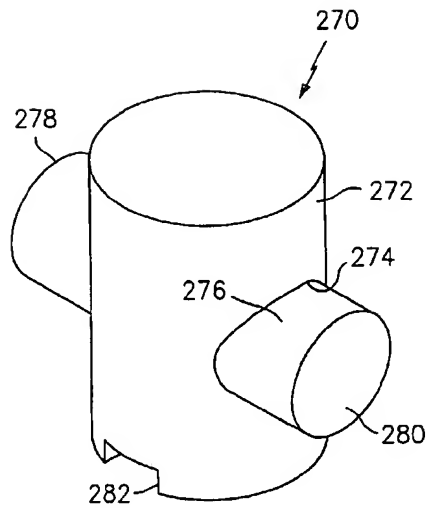


FIG. 49

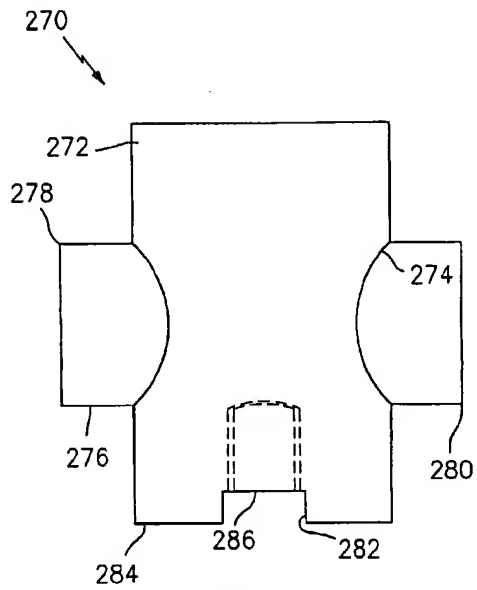


FIG. 50

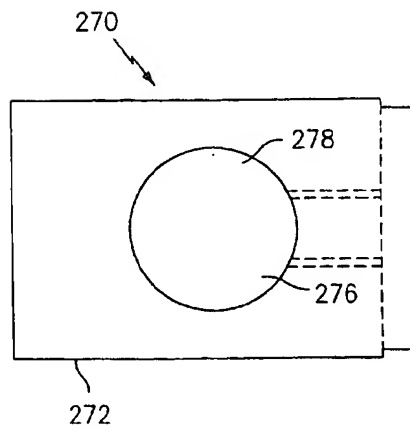


FIG. 51

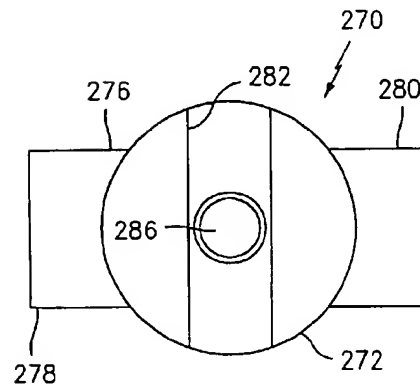


FIG. 52

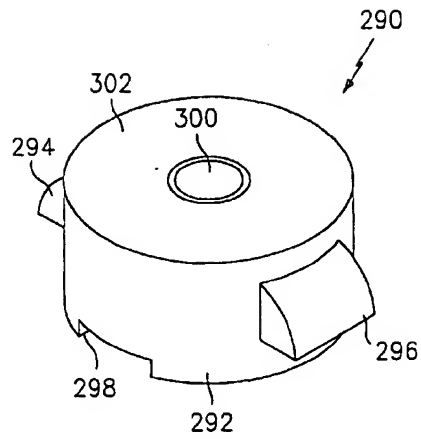


FIG. 53

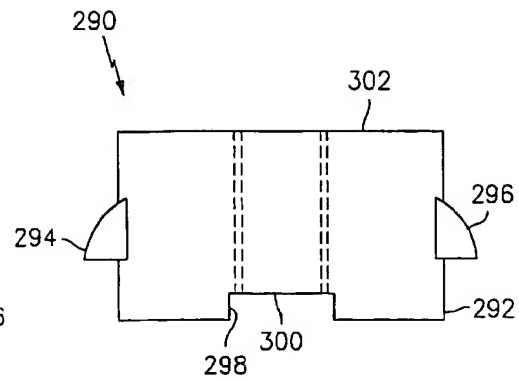


FIG. 54

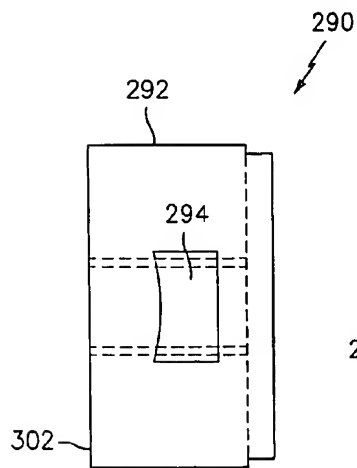


FIG. 55



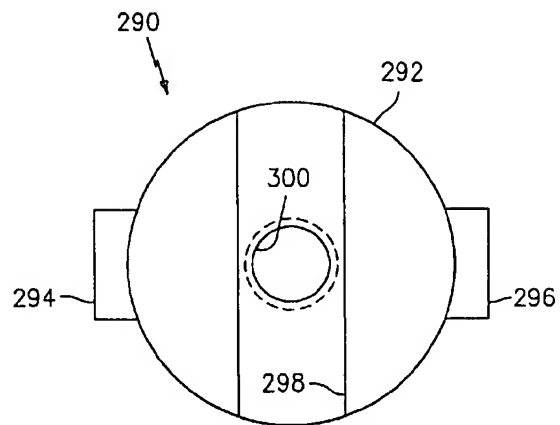


FIG. 56




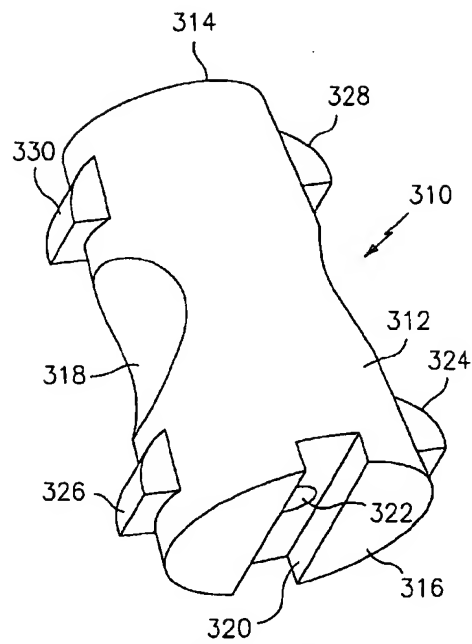


**FIG. 57**

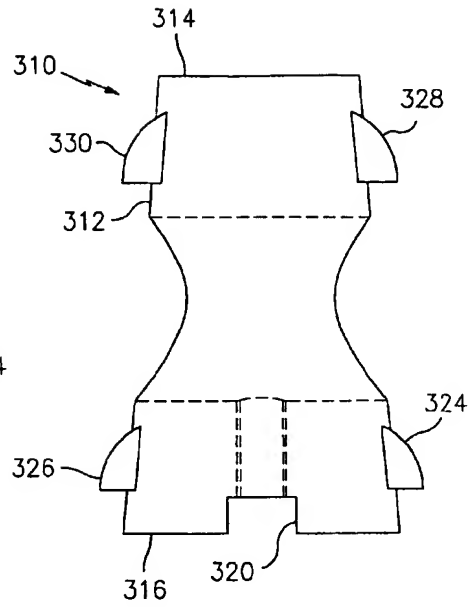

**FIG. 58**

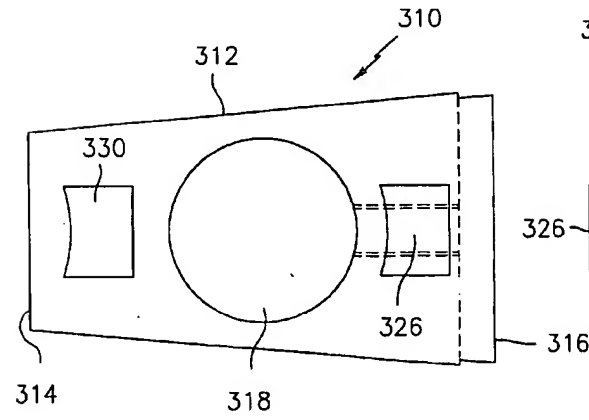


**FIG. 59**

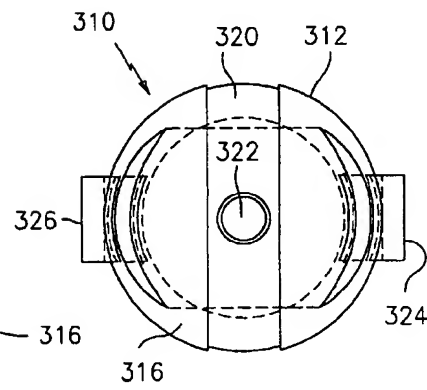


**FIG. 60**


15/15

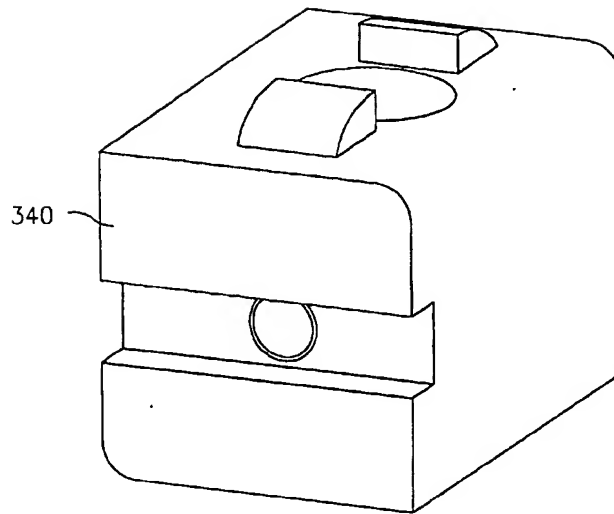

*FIG. 61*

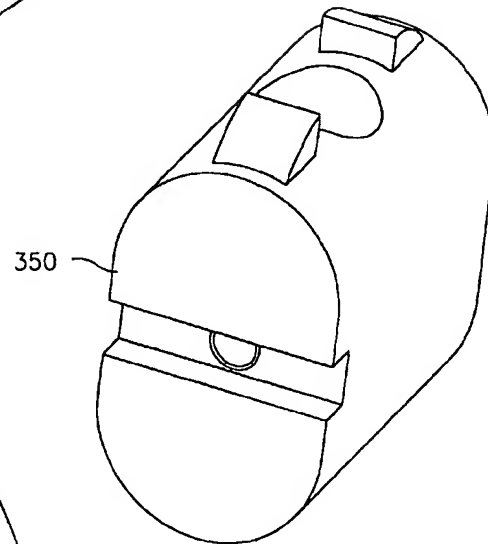

*FIG. 62*

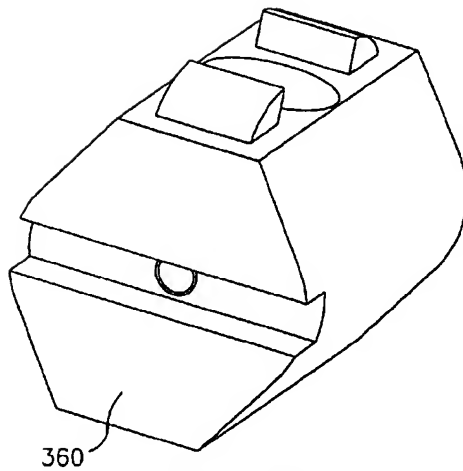

*FIG. 63*

SUBSTITUTE SHEET (RULE 26)